

### **ATHLETE**

High Accuracy / Best Quality

#### **ATHLETE**

## High performance cutting machine with excellent cutting quality.

Athlete is the advanced table type cutting system designed for speed and precision, best suited for high definition plasma cutting operation.

Special compact design takes minimum floor space, provide quick installation, friendly operation, and "Put & Cut" application!





#### **Features**

- All-in-one compact design.
- Outstanding cutting quality and accuracy.
- High efficiency sequential zone fume collection table ready for use.
- Easy installation and minimum setup time.
- Maximum working width with minimum space requirements.

#### **ATHLETE**

#### **Optional accessories**

- ProArc Sensor THC
- Mechanical height control
- Pneumatic sheet clamp
- · Laser point positioning unit
- Gas control system(with high preheat) for oxyfuel cut
- · Safety light curtain
- Water table with water level control



ProArc Dust collector

#### **OPC**

Operating Console.

#### Safety light curtain

**Operator Safety** 

#### Gas control system

Oxyfuel cutting thickness up to 50mm.



# lete

#### Downdraft table

High efficiency, maintenance free mechanical duct-gate.

#### Water table


Water table with water level control and slug tank.



Accurate height control with fast positioning for plasma.








#### **Specification**

| Model              | Unit  | Athlete 15                      | Athlete 20      | Athlete 25                   | Athlete 4020 |
|--------------------|-------|---------------------------------|-----------------|------------------------------|--------------|
| Power input        | ~     | AC 220 / 380V, 50/60Hz, 3 Phase |                 |                              |              |
| Drive method       |       | Precision rack & Pinion         |                 |                              |              |
| Travel rail        |       | Double linear way               |                 |                              |              |
| Overall width (A)  | mm    | 2,250                           | 2,550           | 3,155                        | 4,650        |
| Overall height (B) | mm    | 1,600                           | 1,600           | 1,600                        | 1,600        |
| Overall length (C) | mm    | 4,150 (7,350 <sup>**1</sup> )   | 4,150 (7,350*1) | 4,150 (7,350 <sup>±1</sup> ) | 3,300        |
| Cutting width (D)  | mm    | 1,600                           | 1,850           | 2,500                        | 4,050        |
| Cutting length (E) | mm    | 3,100 (6,200*1)                 | 3,100 (6,200*1) | 3,100 (6,200*1)              | 2,030        |
| Cutting speed      | m/min | 16                              |                 |                              |              |
| Traveling speed    | m/min | 24                              |                 |                              |              |
| Position accuracy  | mm    | +/-0.1                          |                 |                              |              |
| Repeatability      | mm    | +/-0.05                         |                 |                              |              |

<sup>\*</sup> Specifications subject to change without notice

#### **Dimensions**

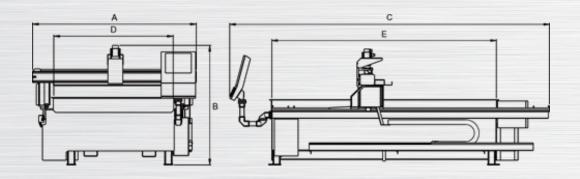

#### **UNITED PROARC CORPORATION**

<sup>%1</sup> For Athlete 1560, Athlete 2060, Athlete 2560